POWER BI REPORT GUIDE

Streaming catalogue: where the audience goes, and where the value is

How the Streaming Catalogue report was built, what each page shows, how to use the dashboards, and how to maintain the project.



Taiwo Ajayi

Report author · Binge Metrics Streaming Group

Report: Streaming Catalogue.pbip (17 pages: 13 story pages, 3 dashboards, 1 drill-through)
Data: Project_09_Streaming_Catalogue.xlsx as stored in the model: 2,500 films, 1970-2023, 167M votes
Tools: Power BI Desktop (PBIP format), DAX queries, powerbi-report-author CLI, Node.js
Version: October 2026

CONTENTS

What is in this guide

1. Executive summary
2. The brief
3. The data
4. The data model
5. The measure library
6. Corrections made to the original report
7. Report walkthrough: story pages
8. Report walkthrough: dashboards
9. How to use the report
10. Design system
11. Numbers to check against
12. Maintaining the project
13. Assumptions and limitations

Appendix A. Project files

> **Who this guide is for.** The acquisitions team who will read or present the report (sections 1, 2, 7, 8 and 9), and analysts who will maintain it (sections 3 to 6 and 10 to 13).

1 · EXECUTIVE SUMMARY

Attention is concentrated, popularity says nothing about quality, and 415 gems wait

2,500
films, 1970-2023

65%
of votes held by 7% of films

6.55
average rating, the same at every vote level

415
hidden gems: rated 7.5+, under 25,000 votes

Verdict	Topic	Evidence
CONCENTRATED	Audience attention	175 high-vote films (7%) hold 65% of votes; the top 10% hold 74%; the bottom half 2.6%
NO LINK	Popularity and quality	Low-vote films average 6.53, medium 6.59, high 6.59; the most-voted films include ratings of 4.6 and 5.7
OPPORTUNITY	Hidden gems	415 films average 8.17 but get 1.4% of votes; 74% of all 7.5+ films are low-vote
WEAK SIGNAL	Genre	All 20 genres average between 6.42 (Sci-Fi) and 6.76 (Biography)
STRONG SIGNAL	Directors	Among 284 directors with 5+ films, averages range from 5.1 to 7.7; 41 average 7 or more

Recommended actions

1. **License the hidden gems.** Start with Crime, Thriller, Drama and Biography, where one film in five is a gem. Target: add 100 gems this year.
2. **Buy by director.** Use the 41 directors averaging 7+ as the shortlist. Target: most new licences from those directors.
3. **Do not pay for popularity.** Price on rating and fit, not vote counts. Target: no premium for votes alone.

Help the acquisitions team find value in the catalogue

Binge Metrics Streaming Group asked for an analysis of an IMDb-style film catalogue to support licensing decisions. The report answers five questions:

1. How is the catalogue spread across decades, genres and runtimes?
2. How concentrated is audience attention?
3. Does popularity or genre predict a good rating?
4. Where are the well-rated films that few people have seen?
5. Which directors have the strongest track records?

> The original report used Bayesian ratings and a hidden-gem rule. Both are kept: the hidden-gem rule (rated 7.5+ with 1,000-25,000 votes) is the backbone of the recommendations.

One rating per film, with bridges to genres and people

The source workbook `C:\Users\user\Downloads\Project_09_Streaming_Catalogue.xlsx` is missing. The model still holds the imported data, so every number in this guide was checked with DAX queries against the open model.

Table	Grain	Key columns
DimTitle	2,500 films	TitleName, StartYear (1970-2023), RuntimeMinutes, IsAdult; Decades, Runtime Bucket
FactRating	One row per film	AverageRating (3.0-9.5), NumVotes (752-1.97M); Vote Category, Hidden Gem
BridgeTitleGenre / DimGenre	4,965 links, 20 genres	About two genres per film
BridgeTitlePerson / DimPerson / DimRole	13,710 links, 2,000 people	Director, actor, actress (writer and producer unused)

Data quality

- Titles and people are anonymised ("Title 3", "Person 484").
- 48 films have no runtime; the rest take a few values from 90 to 180 minutes.
- 51 films are flagged adult; they are kept.
- No duplicate ratings, orphan keys or missing years were found.

A film-centred model with two bridges

From	To	Notes
FactRating[TitleID]	DimTitle[TitleID]	Filters both ways
BridgeTitleGenre[TitleID]	DimTitle[TitleID]	Filters both ways, so a genre choice reaches ratings
BridgeTitleGenre[GenreID]	DimGenre[GenreID]	Many to one
BridgeTitlePerson[TitleID]	DimTitle[TitleID]	Filters both ways
BridgeTitlePerson[PersonID] / [RoleID]	DimPerson / DimRole	Many to one

Measures live in `ALL DAX measures`; those added for this version are in the display folder **Report v2**. Because films have about two genres, genre totals add up to more than the catalogue total.

The measures the report uses

Measure	Definition	Format
Total Title	Distinct films	0
Total Votes / Median Votes	Sum / median of NumVotes	0 / #,0
Average Rating	Average of AverageRating	0.00
Bayesian Rating	Rating shrunk toward the global mean with a 10,000-vote prior	general
Number of Hidden Gem / Hidden Gem Rate %	Films rated 7.5+ with 1,000-25,000 votes / share of films	#,0 / 0.0%
Gem Vote Share %	Votes on hidden gems / all votes	0.0%
Rated 7.5+	Films rated 7.5 or more	#,0
Top 10% Vote Share	Votes held by the 10% most-voted films	0.0%
Title / Vote Share of Total %	Share of films / votes at each vote level	0.0%
Genre HHI / Even Genre HHI	Sum of squared genre vote shares (shares add to 100%) / 1 ÷ number of genres	0.000
Director Avg Rating (5+)	Director average, only for directors with 5+ films	0.00
Qualified Directors / Directors Averaging 7+	Directors with 5+ films / of those, averaging 7+	#,0
Top Genre by Votes	Genre with the most votes in the selection	text

```
Genre HHI =
VAR _votes = ADDCOLUMNS ( VALUES ( DimGenre[GenreName] ), "@v", [Total Votes] )
VAR _total = SUMX ( _votes, [@v] )
RETURN SUMX ( _votes, POWER ( DIVIDE ( [@v], _total ), 2 ) )
```

6 · CORRECTIONS

Four things fixed from the original report

#	Issue	Fix
1	Genre HHI squared vote shares that added up to about 200% (films have two genres), giving 0.21-0.39 and a "rising concentration" story	Shares now add to 100%: 0.052 overall (0.050 is perfectly even), 0.055-0.060 per decade; the 2020s reach 0.080 only on 172 films
2	48 films with no runtime were labelled "Under 60"; no film is shorter than 90 minutes	Labelled "Unknown", with a runtime sort order
3	"Biography and Romance clearly outperform" overstated a 0.35-point spread	Genre shown as a weak signal; directors (2.6-point spread) as the strong one
4	Hidden gem counts showed two decimals (415.00)	Whole numbers


7 · REPORT WALKTHROUGH

Story pages: thirteen pages, one finding each

Each story page has a Georgia title that states the finding, lavender context bars with the key bars highlighted, a source line and a Dashboards button. Amber is used only for hidden gems.

1 Cover

Film-themed cover: film strips, a projector beam and a play button on night purple (drawn by _build\\make-cover.ps1), with the title, the author block (Taiwo Ajayi, Binge Metrics Streaming Group) and **Start the story**.

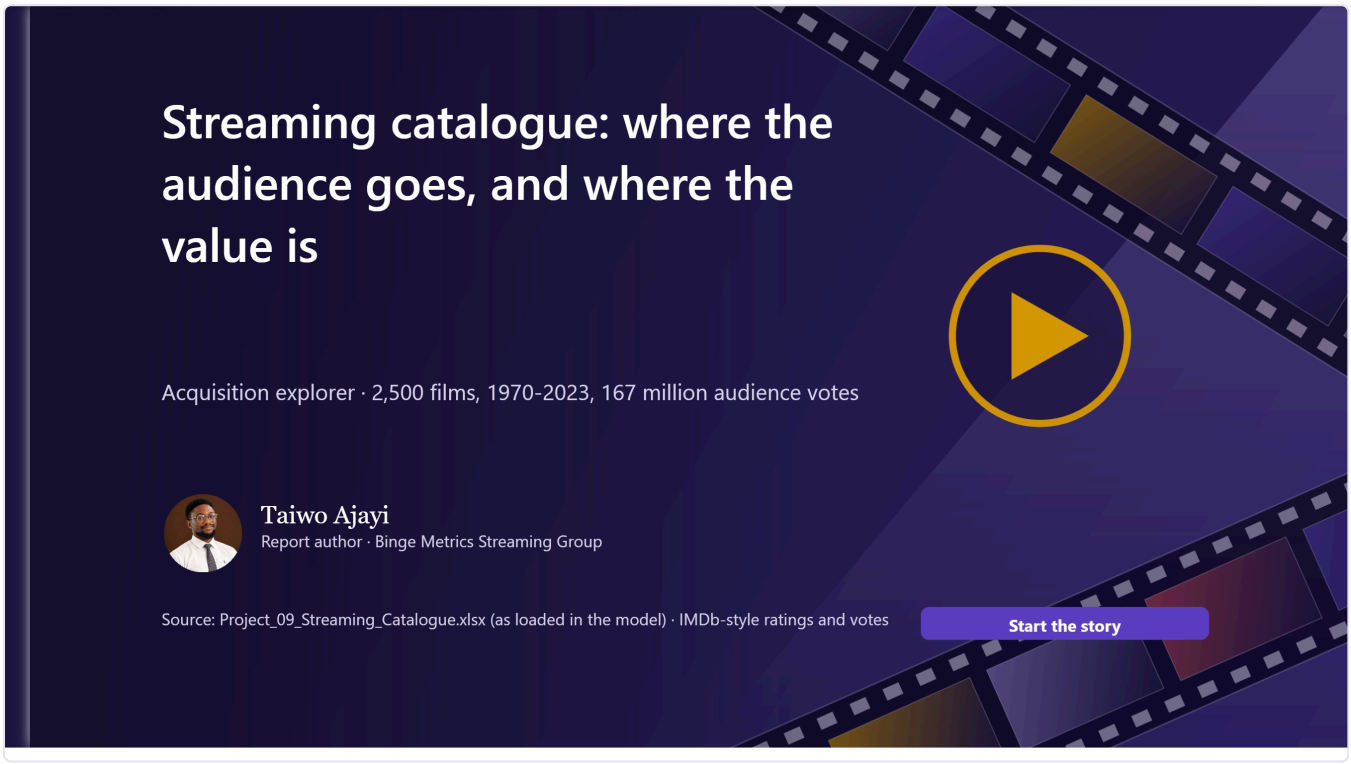

2 Brief

Aim, five questions and scope tiles: 2,500 films, 167.4M votes, 6.55 average, 284 directors with 5+ films.

The brief: help the acquisitions team find value in the catalogue

Aim
Show the acquisitions team where audience attention goes, what predicts a well-rated film, and which films and directors are worth licensing.

Questions this report answers

- How is the catalogue spread across decades, genres and runtimes?
- How concentrated is audience attention?
- Does popularity or genre predict a good rating?
- Where are the well-rated films that few people have seen?
- Which directors have the strongest track records?

2,500
films

167.4M
audience votes

6.55
average rating

284
directors with 5+ films

20 genres (about two per film), 2,000 people, 1970-2023. Titles and people are anonymised, and the source workbook is missing; numbers come from the data stored in the model.

Source: Streaming Catalogue model (Project_09_Streaming_Catalogue.xlsx) · 2,500 films, 1970-2023 · 2

Dashboards

3 Scorecard

Four headline KPIs and five findings with verdict pills.

Attention is concentrated, popularity says nothing about quality, and 415 gems wait

2,500
films

167.4M
audience votes

6.55
average rating

415
hidden gems

CONCENTRATED	**Audience attention**	7% of films hold 65% of all votes; the bottom half hold 2.6%
NO LINK	**Popularity and quality**	Low-vote films average 6.53, high-vote films 6.59
OPPORTUNITY	**Hidden gems**	415 films rated 7.5+ with under 25,000 votes get just 1.4% of votes
WEAK SIGNAL	**Genre**	All 20 genres average between 6.4 and 6.8
STRONG SIGNAL	**Directors**	Director averages range from 5.1 to 7.7; 41 average 7 or more

Source: Streaming Catalogue model (Project_09_Streaming_Catalogue.xlsx) · 2,500 films, 1970-2023 · 3


Dashboards

4 Catalogue shape


Films by decade (the 2020s are partial) and by runtime (60% run 90-119 minutes; 48 unknown).

Six in ten films run 90-119 minutes; each decade holds 450-500 films

Films by decade

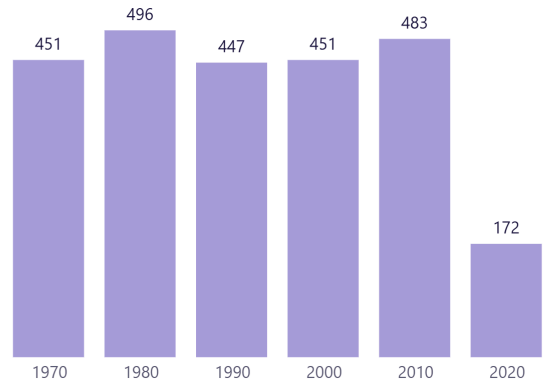

Films by runtime

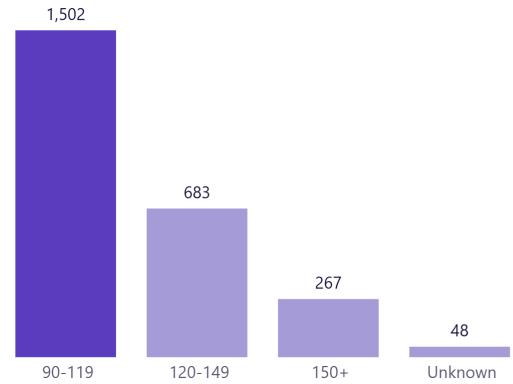

The 2020s cover only 2020-2023, and 48 films have no runtime (shown as Unknown; they were labelled "Under 60" before).

Source: Streaming Catalogue model (Project_09_Streaming_Catalogue.xlsx) · 2,500 films, 1970-2023 · 4


Dashboards

5 Vote concentration

Share of films against share of votes at each vote level: 7% of films hold 65% of votes.

7% of films hold 65% of all votes; the top 10% hold 74%

Share of films and share of votes, by vote level

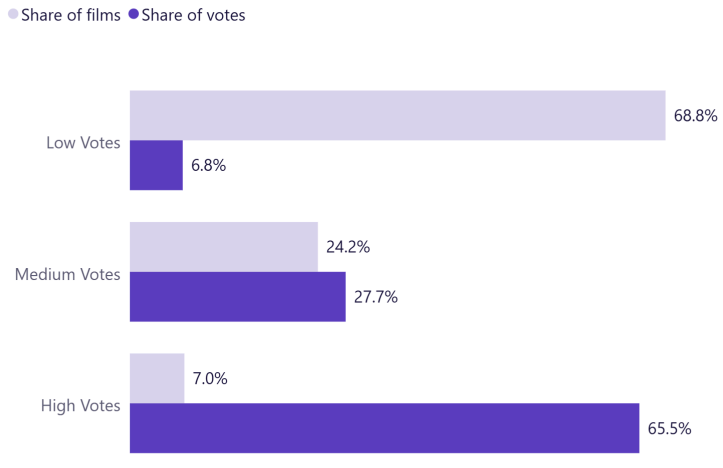

74.3%
of votes go to the 10% most-voted films

8,720
votes for the typical film (max 1.97M)

Most of the catalogue is barely seen.
Vote levels: low under 25,000; medium 25,000-250,000; high 250,000+.

Source: Streaming Catalogue model (Project_09_Streaming_Catalogue.xlsx) · 2,500 films, 1970-2023 · 5


Dashboards

6 Popularity vs quality

Average rating by vote level on a 0-10 scale, and the ten most-voted films with ratings from 4.6 to 7.5.

Popularity does not predict quality: every vote level averages about 6.5

Average rating by vote level

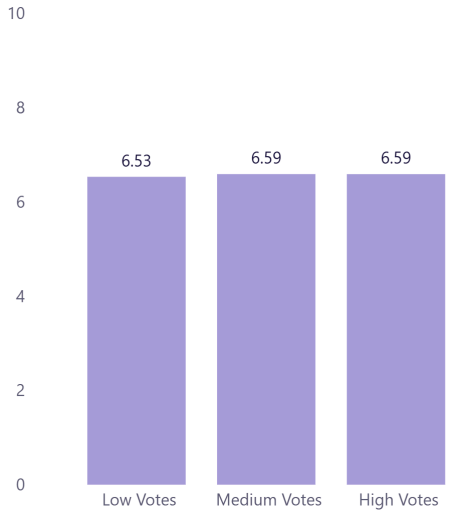

The 10 most-voted films and their ratings

Film	Year	Votes	Rating
Title 82	1991	1,967,408	7.50
Title 1355	1994	1,942,473	7.20
Title 1391	1985	1,937,539	6.10
Title 1018	1990	1,898,637	4.60
Title 130	2020	1,861,051	5.70
Title 1289	2003	1,797,015	6.40
Title 1433	2020	1,782,337	5.80
Title 1826	2001	1,757,196	7.00
Title 2303	1983	1,719,325	7.00
Title 2232	1985	1,711,247	7.10

Source: Streaming Catalogue model (Project_09_Streaming_Catalogue.xlsx) · 2,500 films, 1970-2023 · 6

Dashboards

7 Genre ratings

Average rating by genre: a 0.35-point spread, Biography highest, Sci-Fi lowest.

Genre barely moves ratings: all 20 genres average between 6.4 and 6.8

Average rating by genre



6.76
Biography, the best-rated genre

6.42
Sci-Fi, the lowest-rated genre

A 0.35-point spread.
Picking a genre tells you little about how well a film will be rated.

Source: Streaming Catalogue model (Project_09_Streaming_Catalogue.xlsx) · a film can belong to more than one genre · 7


Dashboards

8 Genre concentration

The corrected concentration index by decade against the perfectly even line.

Votes are spread almost evenly across genres in every decade

Genre concentration index (HHI) by decade

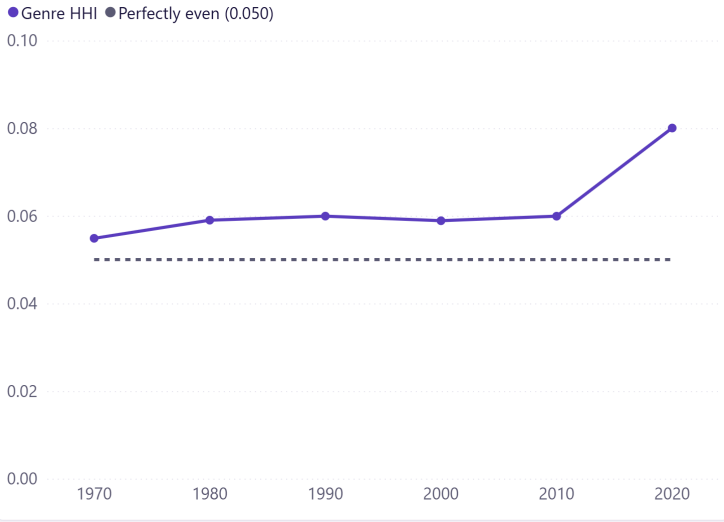

0.052

concentration across all films (0.050 = even)

The old report said concentration was rising.

Its index squared shares that added up to about 200%, because films have two genres. Corrected, every decade sits near even; the 2020s bump comes from having only 172 films.

Source: Streaming Catalogue model (Project_09_Streaming_Catalogue.xlsx) · 2,500 films, 1970-2023 · 8


Dashboards

9 Ratings over time


Average rating by decade, and Biography against Sci-Fi.

Ratings have held at about 6.5 since the 1970s; Sci-Fi is the exception

Average rating by decade

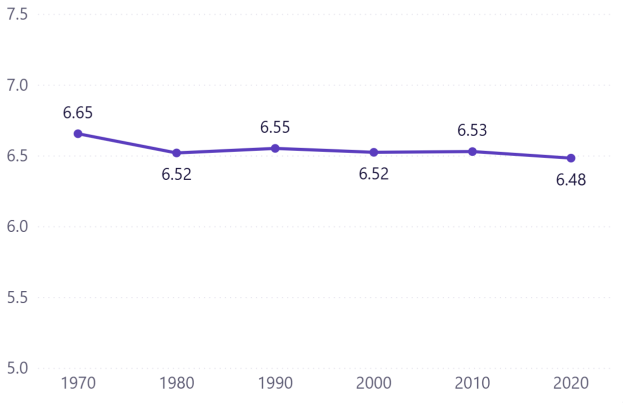

Biography vs Sci-Fi by decade

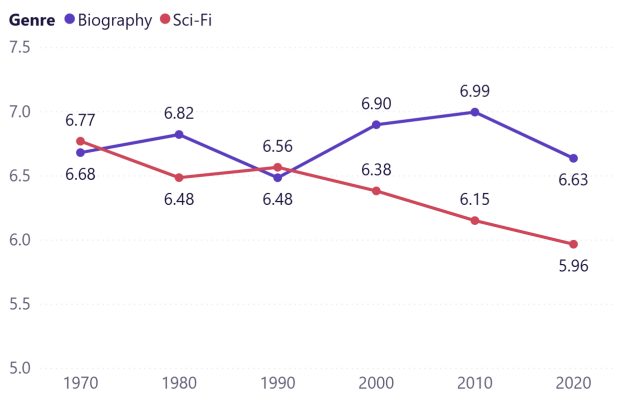

Sci-Fi lost 0.8 points from the 1970s to the 2020s; each genre has only about 40 films per decade, so treat genre trends with care.

Source: Streaming Catalogue model (Project_09_Streaming_Catalogue.xlsx) · 2,500 films, 1970-2023 · 9


Dashboards

10 Hidden gems

Hidden gem rate by genre and four gem KPIs.

415 hidden gems: films rated 7.5+ that few people have voted for

Share of films that are hidden gems, by genre

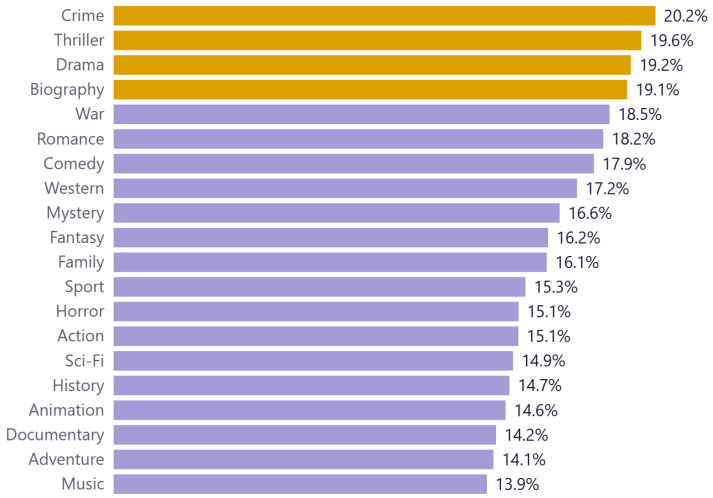

415
hidden gems

16.6%
of films are hidden gems

8.17
average rating of the gems

1.4%
of all votes go to the gems

Source: Streaming Catalogue model (Project_09_Streaming_Catalogue.xlsx) · hidden gem = rated 7.5+ with 1,000-25,000 votes · 10

Dashboards

11 Directors

Top 12 directors with 5+ films, and how many average 7 or more.

Directors matter more than genre: their averages range from 5.1 to 7.7

Top 12 directors by average rating (5+ films)



284
directors with 5+ films

41
of them average 7 or more

2.6 points against 0.35.
Director track records spread ratings seven times more than genre does. Names are anonymised in this data.

Source: Streaming Catalogue model (Project_09_Streaming_Catalogue.xlsx) · directors with 5 or more films · 11

Dashboards

12 Recommendations

Three actions with targets and supporting KPIs.

Three actions: license the gems, buy by director, stop paying for popularity

1

License the hidden gems

415 films rated 7.5+ draw only 1.4% of votes, so they should be cheap. Start with Crime, Thriller, Drama and Biography, where one film in five is a gem.

Target: add 100 gems this year

2

Buy by director

Director records spread ratings by 2.6 points; genre by 0.35. Use the 41 directors averaging 7+ as the shortlist.

Target: most new licences from 7+ directors

3

Do not pay for popularity

The most-voted films are no better rated than the rest. Price on rating and fit, not vote counts.

Target: no premium for votes alone

415
hidden gems to license

41
directors averaging 7+

1.4%
of votes the gems get today

Source: Streaming Catalogue model (Project_09_Streaming_Catalogue.xlsx) · targets are planning goals, not forecasts · 12

Dashboards

13 Data notes

Corrections, data limits, runtime summary and what still holds.

Assumptions and data issues behind these numbers

Corrections to the original report

- Genre HHI squared shares that added up to about 200%; it now uses shares that add to 100%, and "rising concentration" disappears.
- The "Under 60" runtime group was 48 films with no runtime; it is now "Unknown".
- Hidden gem counts showed two decimals; now whole numbers.

Data limits

- Titles and people are anonymised (Title 3, Person 484).
- Runtimes take only a few values (90 to 180 minutes): a teaching sample.
- The 2020s are partial (2020-2023); 51 films are flagged adult and kept.
- The source workbook is missing, so the data cannot be refreshed.

Films, rating and gems by runtime

Runtime	Films	Rating	Gems
90-119	1,502	6.54	250
120-149	683	6.54	109
150+	267	6.61	43
Unknown	48	6.69	13

What still holds.
The patterns (vote concentration, the weak link between votes and rating, the director spread) are measured the same way for every film, so they are safe to act on within this catalogue.


Source: Streaming Catalogue model (Project_09_Streaming_Catalogue.xlsx) · all films · 13

Dashboards

Dashboards: three bento pages and a director profile


D1 Catalogue overview

Hero tile with films in the selection. KPI cluster: votes, median votes, rating, films rated 7.5+. Rating by decade, films by runtime, share of films against share of votes.

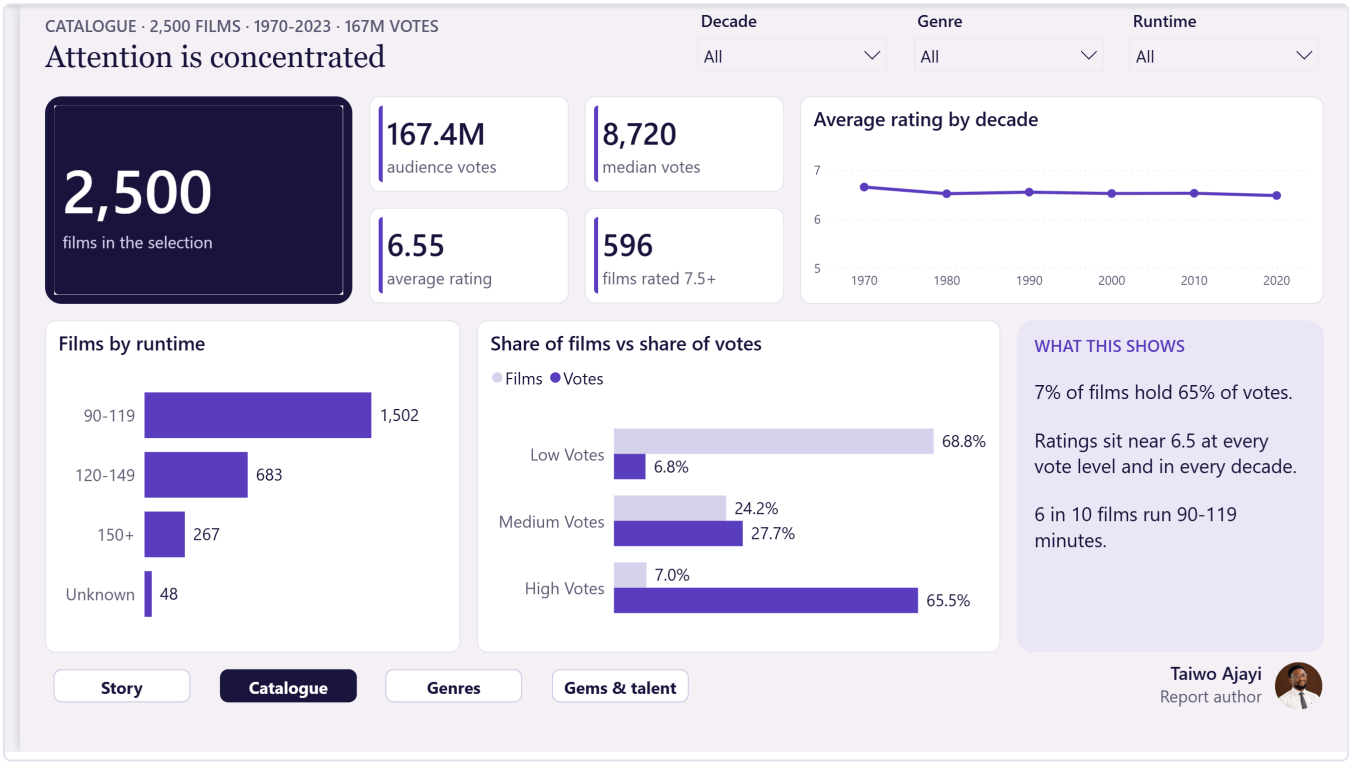

D2 Genres and audience

Hero tile names the most-voted genre. KPI cluster: votes, genre concentration, rating, gem rate. Concentration by decade, top genres by rating and by votes.

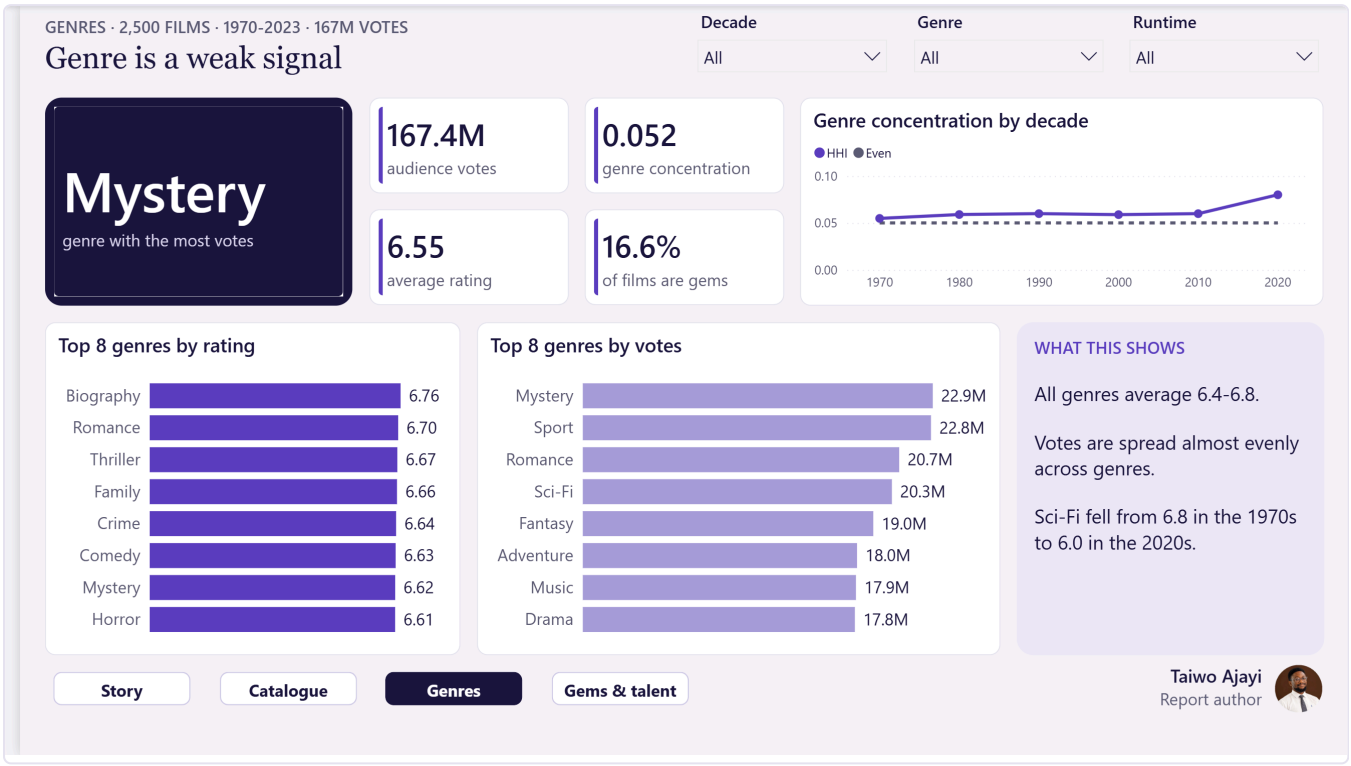


D3 Hidden gems and talent

Hero tile with the number of gems. KPI cluster: gem rate, gem vote share, qualified directors, directors averaging 7+. Gems by decade, gem rate by genre, top directors.



Director profile

Hidden drill-through page. Right-click a director bar and choose Drill through, then Director profile, to see the director's films, ratings, votes, gems and genres. **Back** returns you to the page you came from.

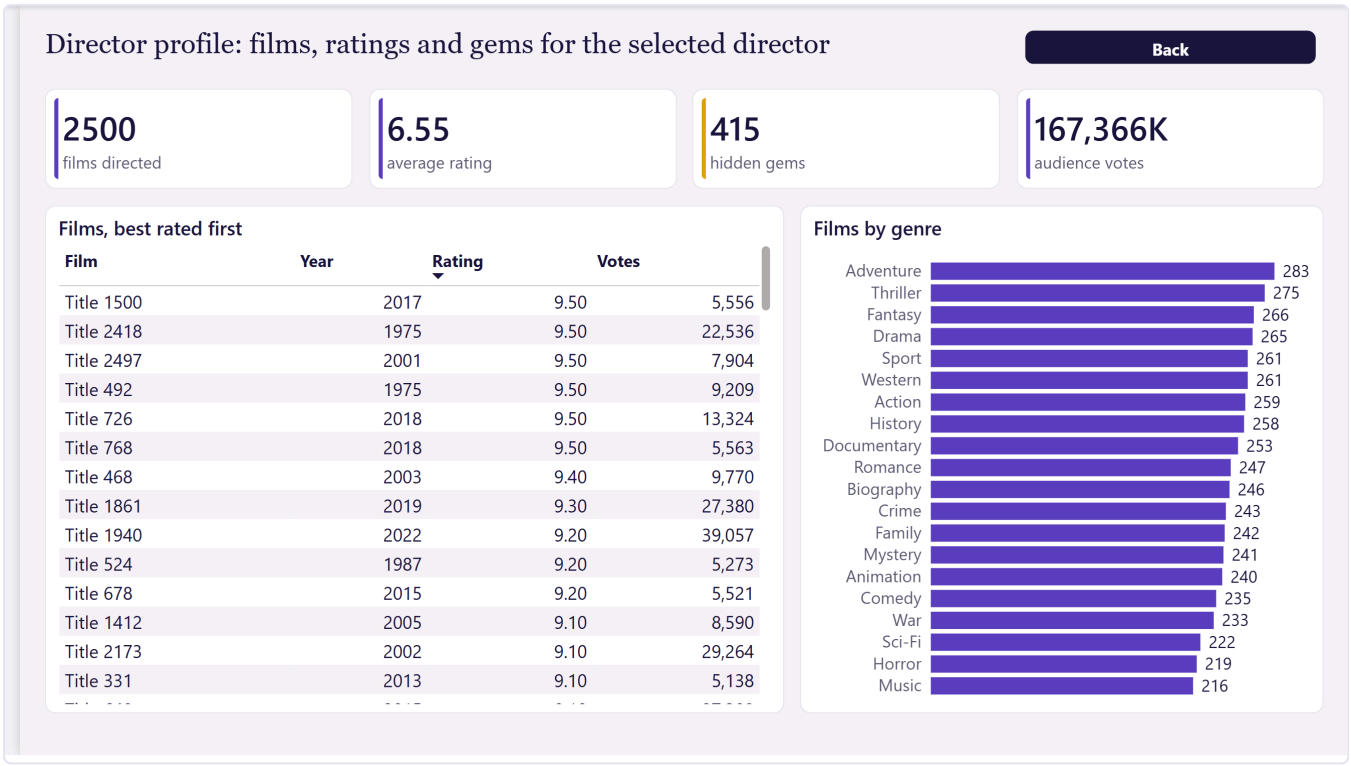

Reading, filtering, drilling and presenting

Navigating

- Start on the cover and press **Start the story**, or use the page tabs. In Desktop, hold Ctrl when clicking a button.
- Every story page has a **Dashboards** button; the dashboards have a **Story** tab back.

Filtering

- **Decade**, **Genre** and **Runtime** filters sit at the top of each dashboard and stay in sync across all three.
- Picking a genre filters films through the genre bridge; a film with two genres appears under both.

Drilling to a director

- Right-click a director bar (page 11 or D3) and choose **Drill through → Director profile**.
- The profile lists the director's films, best rated first, with their genres, gems and votes. Press **Back** to return.

Presenting

- Use the story pages in order for a briefing; switch to the dashboards for questions.
- Use page 10 and D3 to build a licensing shortlist: filter by genre, then drill into directors.

Calm and editorial, recoloured for streaming

Night #1D1640
titles, hero tiles

Violet #5A3FC0
accent, highlights

Amber #E0A100
hidden gems only

Coral #D1495B
problems only

- Page #F5F4F9; white tiles with a #E5E2EF hairline; Georgia titles; Segoe UI body; nothing under 12pt.
- Bento dashboards: dark hero tile, 2 × 2 KPI cluster, wide chart, mixed-width tiles and a tinted "what this shows" tile; author block bottom-right.
- Same design system as the Bank Churn, FAO and Olympics reports, built from one shared generator.

Tie-out values (no filters)

Check	Value
Films / votes / average rating	2,500 / 167,365,919 / 6.55
Median / maximum votes	8,720 / 1,967,408
Films by vote level: low / medium / high	1,721 / 604 / 175
Vote share by level: low / medium / high	6.8% / 27.7% / 65.5%
Rating by level: low / medium / high	6.53 / 6.59 / 6.59
Top 10% vote share	74.3%
Rated 7.5+ / hidden gems / gem rate	596 / 415 / 16.6%
Gem average rating / gem vote share	8.17 / 1.4%
Genre rating range	6.42 (Sci-Fi) to 6.76 (Biography)
Gem rate: Crime / Thriller / Drama / Biography / Music	20.2% / 19.6% / 19.3% / 19.1% / 13.9%
Genre HHI: all / 2020s / even	0.052 / 0.080 / 0.050
Rating by decade: 1970s / 2020s	6.65 / 6.48
Runtime: 90-119 / 120-149 / 150+ / unknown	1,502 / 683 / 267 / 48
Directors with 5+ films / averaging 7+	284 / 41

How to refresh, change and rebuild the report

Refresh the data

Put `Project_09_Streaming_Catalogue.xlsx` back in `C:\Users\user\Downloads\` (or change the path in Power Query), open `Streaming Catalogue.pbip` and press **Refresh**. Then update the numbers in titles and notes, which are written text.

Change a page

Pages are generated. Edit `_build\generate-report.js`, then run:

```
cd "C:\Users\USER\Desktop\ALL PROJECTS\Streaming catalogue"
node _build\generate-report.js
powerbi-report-author validate "Streaming Catalogue.Report"
```

Close Power BI first (or apply external changes) so Desktop does not save its older copy over the new pages. The `.pbix` in the folder is the old version and is not changed by the generator.

Change a measure

Edit it in Power BI Desktop and save, or edit the TMDL files with Desktop closed. `_build\fix-model.js` re-applies this version's fixes and is safe to run twice.

What the numbers can and cannot tell you

- Titles and people are anonymised, so the report ranks IDs; join real names before using the shortlist.
- Runtimes take only a few values: the data is a teaching sample, not a live catalogue.
- The 2020s are partial (2020-2023, 172 films); genre-by-decade trends rest on about 40 films each.
- Votes measure attention, not licence cost; "cheap to license" is an assumption to check with pricing data.
- The hidden-gem rule (7.5+, 1,000-25,000 votes) is a business rule; changing it changes the counts.
- The source workbook is missing; the data cannot be refreshed until it is restored.

APPENDIX A

Project files

Path (in ALL PROJECTS\Streaming catalogue)	What it is
`Streaming Catalogue.pbip`	Open this in Power BI Desktop
`Streaming Catalogue.SemanticModel\`	The data model as TMDL text files
`Streaming Catalogue.Report\`	The report as PBIR files. Generated; do not edit by hand
`Streaming Catalogue.pbix`	The original single-file report (unchanged)
`_brief\report-spec.md`	Approved report spec
`_build\generate-report.js`	Generator for the theme and all report pages
`_build\fix-model.js`	Re-applies the measure and column fixes
`_build\backup\`	The original report and model before the redesign
`Streaming_Catalogue_Report_Guide.pdf`	This guide